

北回化學股份有限公司為工業用接著劑、密封劑與特殊化學用品的專業製造商，為工業界提供了設計、製造、組裝與維修上最低成本、最優質可靠的解決方案。產品應用廣泛地橫跨傳統產業、電子產業、電機產業、醫療器材產業、鐵路運輸產業、船舶產業、運動器材產業、手工具與氣動工具、3C電子產品、汽機車等產業。

Cartell Chemical Co., Ltd., established in 1994, is a world-class manufacturer of industrial adhesives, sealants, and specialty chemical products. Its flagship brand MXBON® delivers high-performance, cost-effective, and reliable solutions for design, manufacturing, assembly, and maintenance across the industrial sector. MXBON® products are widely used in a broad range of industries, including traditional manufacturing, electronics, electrical engineering, medical equipment, railway transportation, shipbuilding, sports equipment, hand tools, pneumatic tools, 3C electronic products, and the automotive industry.

北回化學股份有限公司

Cartell Chemical Co., Ltd.

嘉義縣民雄工業區成功街18號

No.18 Cheng Gong Street.

Min-Shyong Industrial Park,

Chia-Yi Hsien, (621) Taiwan.

Tel: +886-5-2203715

Fax: +886-5-2203720

E-mail: sales@mxbon.com




分公司/授權經銷商資訊
Branch/Authorized Dealer Information

※本型錄內容會有因產品改良而有變更的可能性，恕不另行通知。
Cartell Chemical Co., Ltd. 版權所有，翻印必究！ 2026.02



A
d
h
e
s
i
v
e
s
e
x
p
e
n
t

mxbon®

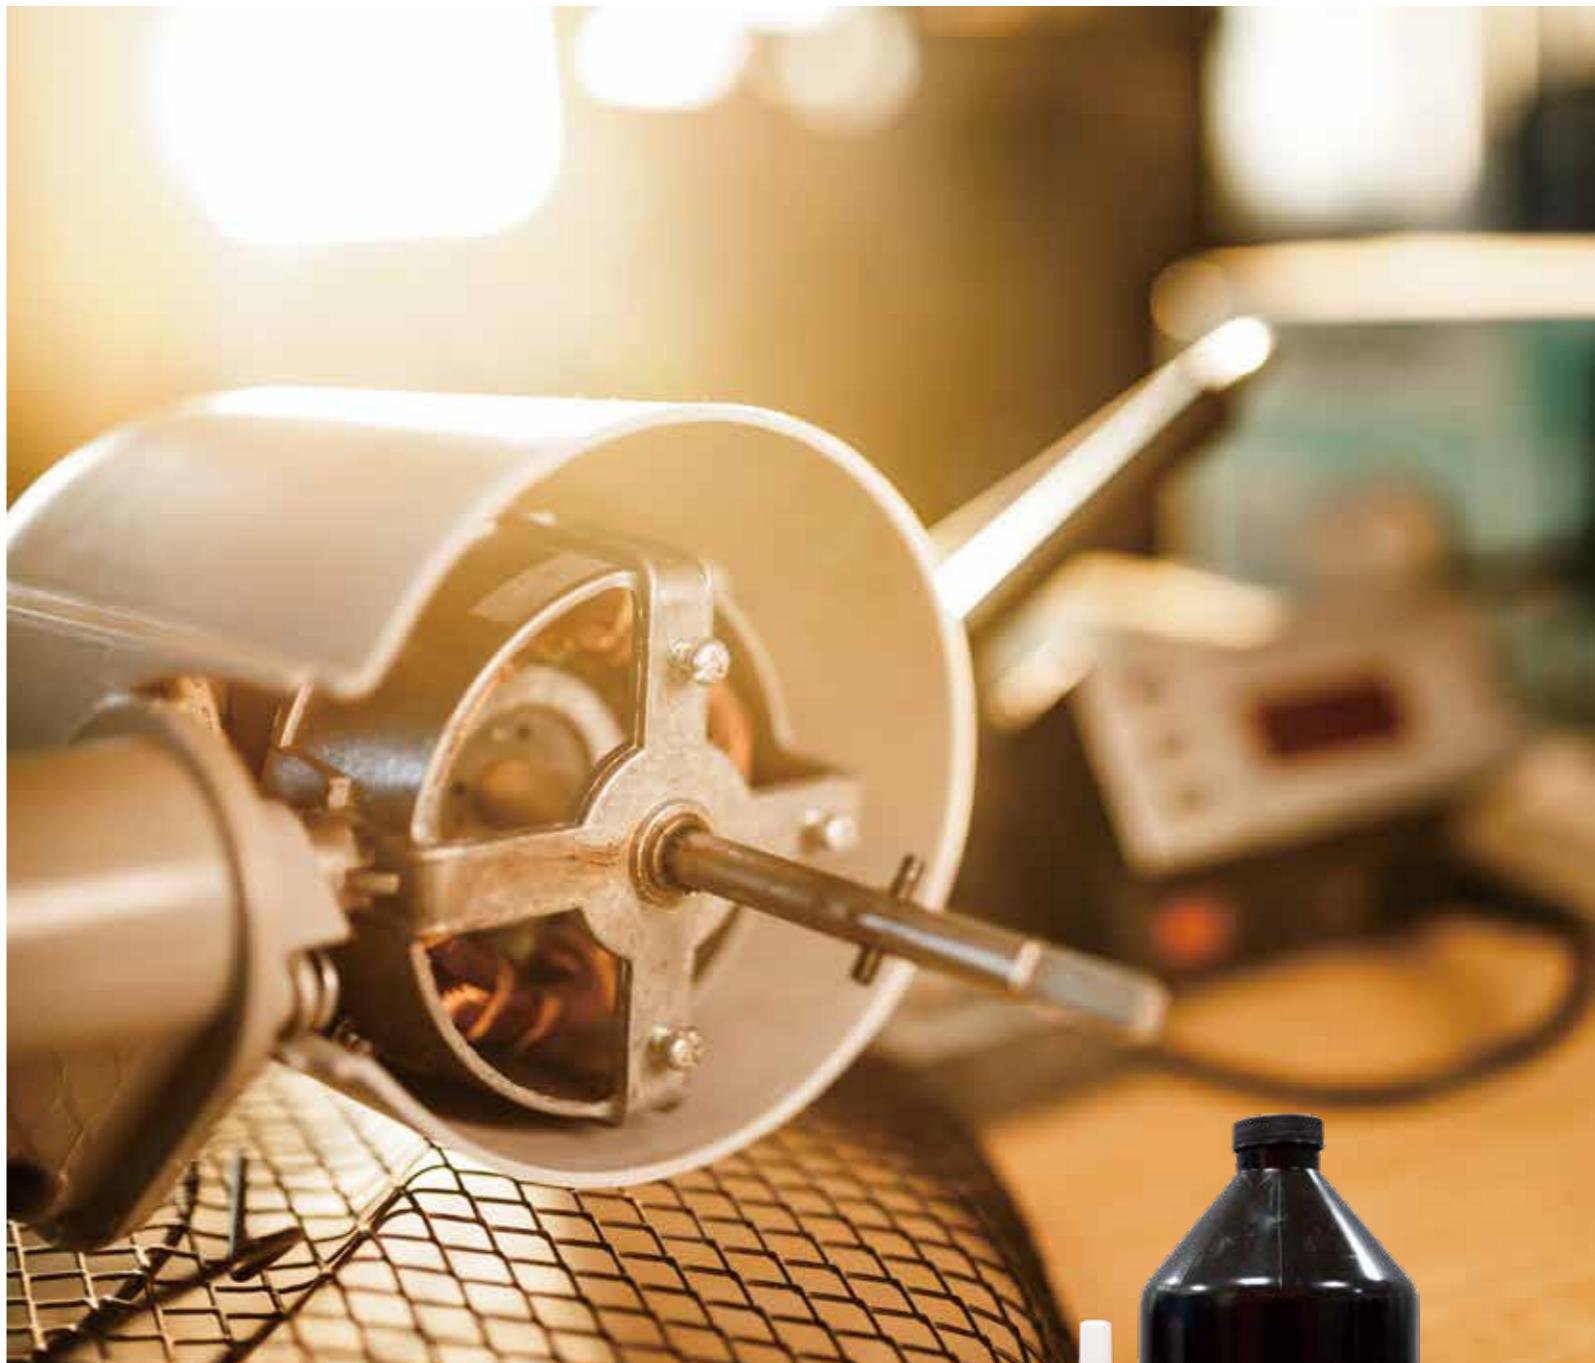

壓克力平面結構膠
STRUCTURAL ADHESIVES



31319 低黏度 單劑厭氧型 金屬玻璃 快速固化*Low viscosity, single compound, for metal and glass, fast curing*

快速接著，搭配加速劑使用可1分鐘固化
0.25mm以下間隙黏接
適用於剛性平整基材，提供優良接著並可抗熱變形與衝擊
對於不同類型金屬、玻璃有快速可靠的接著能力，如後視鏡支架、玻璃飾件組裝等應用
Provides rapid bonding performance; cures within 1 minute when used with activator.
Ideal for bonding gaps under 0.25 mm.
Designed for rigid and flat substrates, delivering excellent adhesion with high resistance to heat distortion and impact.
Offers fast and reliable bonding across various types of metals and glass, making it suitable for applications such as rearview mirror bracket attachment and glass ornament assembly.

31330 高黏度 單劑型 金屬機械應力專用*High viscosity, single compound, especially for metal mechanical stress*

金屬平面接著專用，需搭配促進劑使用
可填補間隙，硬化後具有高效的耐震動及耐衝擊能力
對應黏著不同基材，包含金屬、鐵氧體等，
電機類零組件，為最高強度要求之金屬接著方案
Especially for the flat metal surface bonding usage. Using it with activator is required.
It can fill the gaps, and provide good vibration and impact resistance after fully cured.
For bonding different metal substrates, including metal, ferrite and other motor components, it is a best metal bonding solution with the highest strength requirements.

31324 中高黏度 單劑厭氧型 大間隙黏接*Mid-high viscosity, single compound, anaerobic type, bigger gap bonding*

堅韌、耐衝擊、高強度與耐化學溶劑的特性，需搭配促進劑使用
具備高強度及快速黏著的速度
0.5~1mm大間隙的黏接
適用於大部分金屬與鐵氧體之黏接，也可用於部分塑膠材料
Durable, impact-resistant, high-strength and chemical-resistance properties.
With high strength and fast fixture time.
For large gap (0.5~1mm).
It is suitable for bonding most metals and ferrites, and can also be used on some plastic materials.
Flexible and impact-resistant, offering excellent sealing performance and a certain degree of water resistance.

31332 膏狀 單劑型 耐高溫專用*Gel type, single compound, for high temperature usage*

膏狀不垂流，可填補一般間隙，硬化後具高效的耐震動及耐衝擊能力
可選擇130°C以上熱烘烤固化
耐高溫200°C，滿足高工作溫度之金屬或鐵氧體等電機類零組件黏接
Low fluidity, for vertical surface, it can fill gaps. After curing, it provides excellent vibration and impact resistance.
It can be cured by heating it above 130°C.
High temperature resistance of 200°C. It is suitable for bonding motor components such as metals or ferrites that come with high working temperatures.

**31326 中高黏度 單劑厭氧型 金屬快速固化***Mid-high viscosity, single compound, anaerobic type, fast curing on metals*

堅韌、耐衝擊、高強度與耐化學溶劑的特性，需搭配促進劑使用
具備高強度及快速黏著的速度
0.25mm以下間隙，2分鐘快速固化
對於不同類型的鐵氧體有良好的接著力，如永久性磁鐵、變壓器鐵芯等應用
Durable, impact-resistant, high-strength and chemical-resistance properties.
With high strength and fast fixture time.
For gaps smaller than 0.25mm. Curing time within 2 minutes.
Good adhesion on different types of ferrites, such as permanent magnets, transformer cores and other applications.

MXBON®壓克力平面結構膠具有優異的機械抗性，可滿足需要高剪切強度、抗剝離力、耐衝擊、抑制震動的工業接著或密封應用。單劑型雙步驟操作，預先塗抹促進劑，不須依特定比例混和調配，即可在常溫下快速固定組裝零件，提供高效率、可靠且耐候性極佳的解決方案。

MXBON Acrylic Structural Adhesives are formulated to provide excellent mechanical resistance, including high shear strength, peel resistance and impact resistance, especially for metal bonding applications. MXBON Acrylic Structural Adhesives are single compound with two-steps operation. Pre-applied activator and no need to mix or allocate a specific ratio. Quick fixture time for assembling parts at room temperature, and it provides a highly efficient, reliable and weather-resistant solution.

產品技術資料 Technical Information

型號 Item No.	外觀顏色 Appearance	適合材質 Suitable Bonding Substrates			黏度 Viscosity mPa.s(cP)	黏補縫隙 Gap Performance 初固/全固 Setting Time/Fully Cured	剪切強度 Shear Strength N/mm ²	工作溫度 Working Temp. °C	其他固化機制 Other Curing Factor	促進劑 Activator
		塑膠 Plastic	玻璃 Glass	金屬 Metal						
31319	琥珀色液體 Amber liquid	◆◆	◆◆		1,500-4,000	0.25mm 5min./24hrs	15-21	-55°C-150°C	017090 017649	
31324	琥珀色液體 Amber liquid	◆	◆	◆◆◆	10,000-24,000	0.5-1mm 5min./24hrs	15-21	-55°C-150°C	037380 037387	
31326	琥珀色液體 Amber liquid	◆	◆◆◆		11,000-25,000	0.25mm 2min./24hrs	≥ 15.2	-55°C-125°C	017090 017649	
31330	不透明，無色至淺黃色液體 Slightly cloudy, colorless to pale yellow liquid	◆	◆◆◆		45,000-90,000	0.5mm 5min./24hrs	15-30	-55°C-125°C	037380 037387	
31332	不透明淺黃色至深琥珀色 Opaque light yellow to dark amber	◆	◆◆◆		75,000-130,000	0.5mm 5min./24hrs	≥ 11	-55°C-200°C Heat cure 20min.@130°C 10min.@150°C	037380 037387	熱烤 Heat cure

*此列表之內容與數據皆以其產品技術資料表(TDS)為準。在決定選用接著劑之前，建議先進行實際測試以確保產品性能。

*The content and data within this list are based on the respective Technical Data Sheets (TDS) of each product. Before deciding on the adhesive to use, it is recommended to conduct actual tests to ensure product performance.

促進劑產品技術資料 Activator Technical Information

型號 Item No.	適用 Usage	特性 Property	主成分 Main Component	線上壽命 On-Part Life	乾燥時間 Dry Time
017090	厭氧膠 厭氧型結構膠 For anaerobic adhesives, anaerobic structural adhesives	本款產品適用搭配於MXBON厭氧膠及密封膠。低氣味、不閃燃、無毒配方，可縮短固化時間。 Formulated for compatibility with MXBON anaerobic adhesives and sealants. Low odor, non-flammable, and non-toxic formulation. Significantly reduces curing time.	甲基丙烯酸酯 Polyethylene Glycol Dimethacrylate	1 hour	不會乾燥 Will not dry
017649	厭氧膠 厭氧型結構膠 For anaerobic adhesives, anaerobic structural adhesives	本款厭氧膠專用促進劑適用於所有厭氧膠的加速固化，縮短固定時間，增加填縫能力。可先塗或後噴。典型應用：非活性金屬表面、金屬電鍍表面。 Anaerobic Adhesive Activator is suitable for all anaerobic adhesives and shortening the fixture time. We can apply it first or spray it later. Typical applications: inactive or plating metal surfaces.	丙酮Acetone 庚烷Heptane	14 days	≤ 100 sec
037380	壓克力結構膠 專用促進劑 For acrylic structural adhesives	本款產品適用搭配於MXBON結構膠。低氣味、不閃燃、無毒配方，可縮短固化時間。 Formulated for compatibility with MXBON acrylic structural adhesives. Low odor, non-flammable, and non-toxic formulation. Significantly reduces curing time.	甲基丙烯酸酯 Polyethylene Glycol Dimethacrylate	2 hrs	不會乾燥 Will not dry
037387	壓克力結構膠 專用促進劑 For acrylic structural adhesives	本款結構膠專用促進劑用於壓克力型結構膠的硬化過程，提高固化速度。單面塗抹再與另一側膠體接觸壓合，對於較大間隙(>0.4mm)或者快速固化的場合，可兩側塗抹。 Structural Adhesive Activator is used in the hardening process of acrylic structural adhesive in order to increasing the curing speed. Apply it on one-side and apply acrylic structural adhesives on the other side, then bond and press them together. For larger gaps (>0.4 mm) or fast curing requirements, it can be applied on both sides.	庚烷Heptane 異丙醇2-Pronanol	2 hrs	≤ 100 sec (Stay wet)